


# FFC Sink Drain


## Standard Custom Form



**FF** linear drains are typically designed for use with liquid applied (cold fluid applied) or fabric sheet membranes. For a sink application the channel of the drain should be undermounted to the counter top or sink top using an epoxy, waterproof adhesive, or equal. The overall inside length of channel (**A**) is the finished length of the drain, with a 1-1/16" flange on all four sides to accept the waterproofing membrane. All outlet locations (**B**) are measured from the right inside channel edge. The angle of the flange under the basin of the sink (**D**) should be the same as the slope of the basin of the sink. These sink drains are provided with a finished edge that is flush with the height of the decorative grate. This height (**E**) is typically the same as the thickness of the sink top material. The outlet diameter (**F**) is available in various sizes and connection types.

Outlet connection types include:

- **No Hub** - Two pipes of the same outside diameter are abutted to each other and joined using a rubber coupling.
- **Slip Fit** - A male tail piece slips into another threaded pipe and is joined together with a slip nut and washer.
- **MPT Threaded** - Outlet of the drain has a male threading that is tapered (MPT) to thread into a tapered female fitting (FPT).

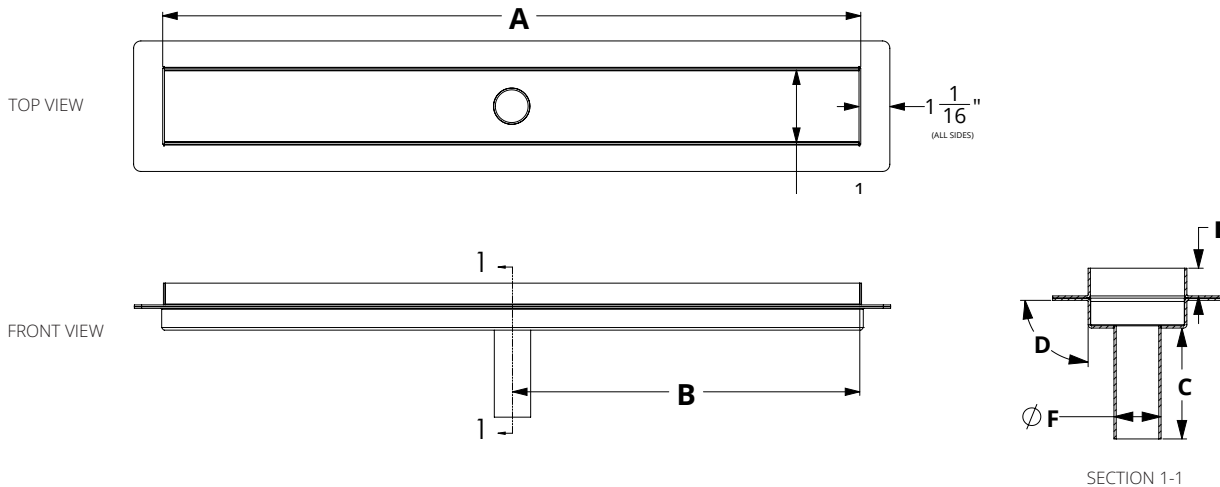

A: Overall Finished Length	B: Outlet Location	C: Outlet Length	D: Flange Angle	E: Finished Edge Height
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Outlet Option (F): Choose (1)					
<input type="checkbox"/> 1 1/2" No-Hub Outlet	<input type="checkbox"/> 1 1/2" Slip Fit Outlet	<input type="checkbox"/> 1 1/2" MPT Threaded Outlet	<input type="checkbox"/> 1 1/4" No-Hub Outlet	<input type="checkbox"/> 1 1/4" Slip Fit Outlet	<input type="checkbox"/> 1 1/4" MPT Threaded Outlet

Grate Styles - Choose (1) Below		OR	Channel Only <input type="checkbox"/>
<input type="checkbox"/> <b>FFMN 65</b> MARC NEWSON PATTERN		<input type="checkbox"/> <b>FFIG 65</b> SLOTTED PATTERN	
<input type="checkbox"/> <b>FFAS 65</b> 2 1/2" WIDE WEDGE WIRE		<input type="checkbox"/> <b>FFED 65</b> OFFSET OVAL PATTERN	
<input type="checkbox"/> <b>FFTIF 65</b> TILE INSERT	 STANDARD INSERT DEPTH ACCEPTS UP TO 3/8" MATERIAL	<input type="checkbox"/> <b>FFSG 65</b> SOLID GRATE	

Grate Finish - Choose (1)	
<input type="checkbox"/> Satin Stainless (SS)	<input type="checkbox"/> Gunmetal
<input type="checkbox"/> Polished Stainless (PS)	<input type="checkbox"/> Matte White
<input type="checkbox"/> Matte Black (BK)	<input type="checkbox"/> Satin Champagne
<input type="checkbox"/> Satin Bronze (SB)	<input type="checkbox"/> Polished Brass
<input type="checkbox"/> Oil Rubbed Bronze (ORB)	<input type="checkbox"/> Polished Gold
<input type="checkbox"/> Custom Finish (Specify Color to Match)	<input type="checkbox"/>
<input type="checkbox"/> Custom finishes can be made to match a sample provided by the customer. Contact Infinity Drain for availability of desired finish.	

### Terms and Conditions:

By signing this form, you are agreeing to the terms and conditions herein. All details and finishes stated are correct. All dimensions are correct and are to be held within a tolerance of +/- 1/16". All other details and dimensions that are specified as "standard" are subject to manufacturer's tolerance and change without notice. We can assume no responsibility for use of superceded or void data. All custom orders are non-cancellable, non-returnable and non-refundable.

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.infinitydrain.com



APPROVAL		JOB NAME/REFERENCE	
NAME <input type="checkbox"/>	<input type="checkbox"/>	DATE <input type="checkbox"/>	<input type="checkbox"/>
SIGNATURE <input type="checkbox"/>	<input type="checkbox"/>		

FM527-11-22

For pricing email: [quotes@infinitydrain.com](mailto:quotes@infinitydrain.com)