

FCS Series

Fixed Flange with Schluter®-KERDI



Features:

- FCS series linear drains are compliant with the Schluter®-Kerdi shower system warranty and backed by the Infinity Drain warranty
- Channel provided with factory applied Schluter®-KERDI
- 16 gauge, 304L stainless steel pre-pitched channel
- Available in 24", 32", 36", 42",48" & 60" lengths
- Available in all grate styles & ten finishes
- See pages 67 74 in the Price List for more information



Linear Drain with Schluter®-KERDI Waterproofing:



Wedge Wire FCSAS 100

Icon Explanation:



Compliant with Schluter®-KERDI shower system warranty. Warranty backed by Infinity Drain.



Available for custom fabrication (length and outlet location) and will ship the following day



Available for custom fabrication, ships within 15 business days



Drains that have an overall lower height.



High flow drains are designed to connect to a 3" waste line. These drains are rated at 21 GPM

All Infinity Drain products are available in ten finishes

Standard Finishes


- Satin Stainless SS
- Polished Stainless PS
- Satin Bronze SB
- Oil Rubbed Bronze ORB
- Matte Black BK

Specialty Finishes (10 day lead time)

- Matte White MW
- Gunmetal GM
- Satin Champagne SC
- Polished Gold PG
- · Polished Brass PB


Custom FCS Channel


Fixed Flange Channel with Schluter®-KERDI Waterproofing

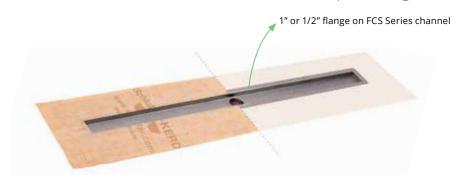

Custom FCS Channel with Schulter® KERDI Waterproofing - Comes with KERDI membrane factory applied to the channel for use with the Schluter KERDI system. Uses a 2" No-Hub Outlet. The overall inside length of channel **(A)** is the finished length of the drain, with a flange on all four sides to accept the waterproofing membrane. All outlet locations **(B)** are measured from the right inside channel edge. For this type of installation a mortar bed or equal is created up to and around the drain with the appropriate slope towards the drain. The waterproofing is applied over the mortar bed and the flange of the channel. Tile or stone is applied directly to the waterproofing for a low profile installation.


FCS Custom Channel available with a 1" or 1/2" Flange and compatible with all linear drain grate styles

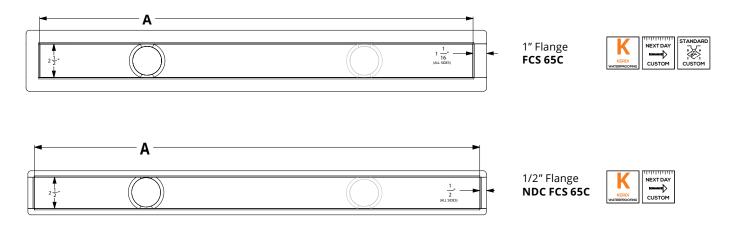

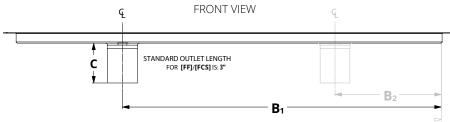

Features:

- 1/2" flange ideal for wall-to-wall and flush against the wall installations
- Available in lengths up up to 96"
- Available in all grate styles & ten finishes
- See page 142 in the Price List for more information




UCR 2

Adapts to Schluter®-KERDI Drain Flange

Universal Ring (UCR 2) Adapts to Schluter®-KERDI Drain Flange For use with Infinity Drain Center Drains

Infinity Drain 4" square & 5" round center drains thread into the UCR 2 in place of Schluter's height adjustment collar

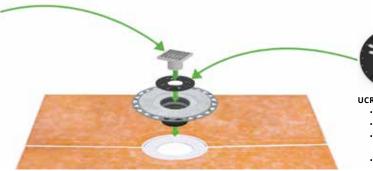



- 5 7/8" diameter x 2" threaded throat
- · Adapts to Schluter®-KERDI drain flange
- For use with 4" square (Pro Series and Premium Series) & 5" round center drains
- See page 189 in the Price List for more information

4" x 4" Premium Center Drains

















5" Round Premium Center Drains











RND 5 - Lines



RQD 5 - Squares



RVD 5 - Weave



RWD 5 - Wedge Wire

4" x 4" Center Drain Pro Series












LTD 4 - Tile Drain LND 4 - Slotted

LSD 4 - Solid

5" x 5" Tile Drains with Schluter®-KERDI Waterproofing



Stainless steel tile drains with factory applied Schluter®-KERDI fabric Available in two heights (for use with 3/8" and 3/4" flooring material)







TSR 5



TDLFS 5



TDFS 5

Features:

- TLSR 5 & TSR 5 drains connect directly to a standard 2" waste line using a no hub connection
- TDFS 5 & TDLFS 5 drains allow for double waterproofing
- Throats are provided with factory applied Schluter®-KERDI
- See pages 85 88 in the Price List for more information

145 Dixon Avenue, Amityville, New York 11701 Phone 516.767.6786 ~ Fax 516.740.3066 www.infinitydrain.com

LT027-02-24



Infinity Drain is made in the USA

Learn more about our Schluter[®] compliant drains

